

Za tehnično podporo ali pomoč pokličite
090-6009



Unitech PA500II Quick Reference Guide

Več informacij: <http://www.info-kod.si>

Vprašanja? Kontaktirajte naše strokovnjake



090-6009



servis@info-kod.si



<http://www.info-kod.si>

Ponedeljek – Petek od 9:00 do 15:00

PA500II Enterprise Mobile Computer

- PA500II -










Quick Reference Guide

400891G Version 1.0

PA500II Product Introduction & Accessory Kit


After opening the box, ensure the following accessories for the PA500II are present:

		
PA500II Terminal	Power Adapter*	Battery Pack
		
Stylus with bungee lanyard	USB charging cable	USB docking station (optional)
		
QRG/UM CD-ROM		

* The adapter's replaceable clip plugs is available, depending on the region.

If anything is missing or appears damaged, contact your dealer.

PA500II Front View

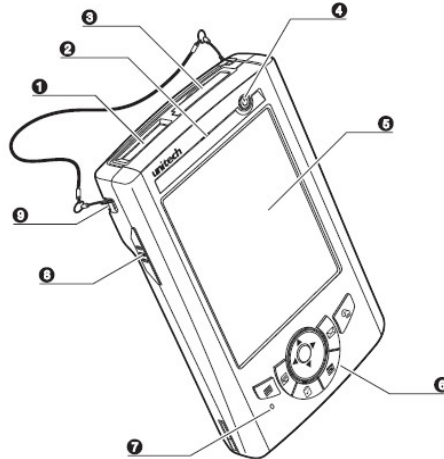

- | | |
|------------------------------------|----------------------------|
| 1 Barcode laser scanner (optional) | 2 Status indicator |
| 3 SDIO/MMC slot | 4 Power button |
| 5 LCD touch screen | 6 Keypad |
| 7 (Reserved) | 8 Left scanner trigger key |
| 9 Cord holder | |

PA500II Rear View



10 Speaker

11 Battery release latch

12 Reset button

13 Main battery

14 Universal connector

15 Right scanner trigger key

16 Stylus


Installing the Battery

WARNING! There is a risk of fire and burns if the battery pack is handled improperly. DO NOT disassemble, crush, puncture, short external contacts, or dispose the battery pack in fire or water. DO NOT attempt to open or service the battery pack. Dispose of used batteries according to the local recycling guidelines in your area.

A backup battery cell is embedded into your device to prevent data loss when the removable battery pack is removed or completely discharged. The backup battery will keep the data and system settings up to 1 hour if the main battery is removed.

NOTE: To enable the internal battery cell to provide backup power supply, charge your device with the main battery pack for at least three and a half hours.

1. Position the battery pack, making sure the battery pack fits the shape of the battery compartment.
2. Slide the battery pack into the battery bay. The battery pack locks to the chassis with an audible click.

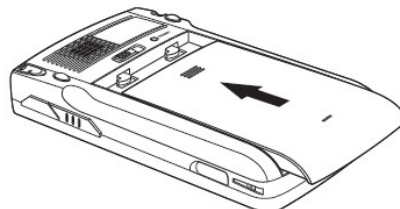

3. If you remove the main battery and plug it back before the backup battery lost power, PA500II will be warm start.
4. If you remove the main battery and plug it back after the backup battery lost power, PA500II will be clean booted.

Charging the Battery


For initial use, you need to charge your device for about 16 hours. After that, you can charge it everyday to recharge the battery to full capacity. You can charge your device using the USB charging cable or the docking station.

CAUTION! Operating the PA500II for the first time without the AC adapter, and without fully charging the backup battery may result in loss of data stored in RAM memory.

NOTE: Data you entered may not be properly stored until the internal backup battery has been fully charged.


To charge the device using the USB charging cable:

1. Attach the clip plug to the AC adapter, if necessary. Slide the replaceable clip plug into the AC adapter until it locks into place with an audible click.
2. Press and hold the connector button on the USB charging cable and connect it to the PA500II (1).
3. Plug the AC adapter cable into the power jack on the USB charging cable (2).
4. Connect the AC adapter into an electrical outlet (3).

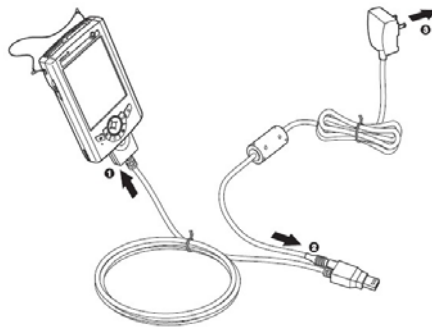

To charge the device using the docking station:

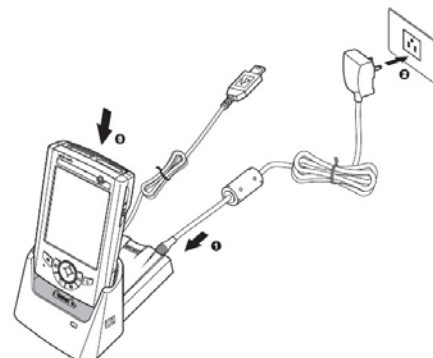

1. Plug the AC adapter cable into the power jack on the docking station.
2. Plug the AC adapter into an electrical outlet.
3. Slide the device into the docking station until it clicks into place.



The connection is secure when the bottom edge of the device is aligned smoothly with the docking station, and the LED indicator on the docking station and device lights up red.


LED status during charging:


- Solid red: Charging
- Solid green: Charging complete

If the battery level becomes low, a status icon appears on the device screen indicating low  or very low battery  status. In both cases, perform an ActiveSync operation to back up your data, and then recharge your device as soon as possible. If the battery level reaches a low status, the device will enter a sleep mode and cannot be powered up until the battery is charged. Windows Mobile 5.0 devices will retain installed applications and data when the main battery is completely drained for extended periods of time.

Turning ON the PA500II for the First Time

After you have initially charged your device for about 16 hours, the device is ready to be used. You can now start up your device where you can calibrate the screen, set up the system time zone, and learn some basic stylus usage.

1. Turn on your device by pressing the Power button  on the front panel.



NOTE: The PA500II screen ships with a protective plastic film. You may remove it by peeling from one corner. The screen will be more susceptible to scratching without the film, but will be more readable.

The unitech PA500II welcome screen appears. The Windows Mobile screen will appear shortly.

2. Calibrate the PA500II

The calibrate screen will automatically appear when the unit is powered-on for the first time or after the system is reset. This screen can also be accessed at any time by tapping Start → Settings → System tab → Screen.

The PA500II will prompt you to calibrate the unit by tapping a sequence of screen locations. Tap gently but firmly. When you have completed the series of taps, press the **Enter** button to confirm it.


3. Set the Time Zone, Date, and Time
Select your current time zone from the Time zone drop-down menu, and then tap **Next**.
4. Follow all onscreen instructions to complete the set up. The setup wizard provides tips for using the pop-up menus and assign a lock password to access your device.

After the device setup, you can create an ActiveSync partnership to synchronize information between your computer and your device. See *Establishing Device-PC Connection* in chapter 3 of user manual for detailed instructions.

Using the SDIO/MMC Slot

Your device has an expansion slot compatible with a range of SD, SDIO, and MMC storage cards, which are primarily used to back up or transfer files and data.

To insert a storage card:

1. Hold the device securely, and then lift the rubber cover from the SDIO/MMC slot .



2. Push the card into the slot until you feel the SD card click into place, and this will signal that the card is already properly seated in the slot.




The card is secure when it is not protruding from the slot.

To remove a storage card:

1. Hold the device securely. Push the card in and release. The card pops out.
2. Remove the card from the slot.

Keypads

The PA500II keypad has a navigation key and six special keys to launch particular applications and display the on-screen keyboard.

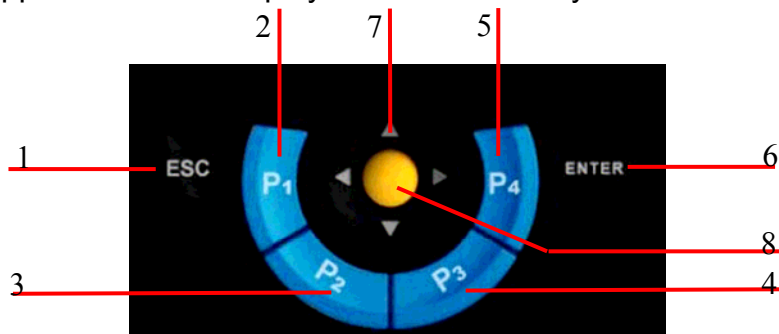

No.	Button Name	Description
1	ESC	Press the ESC button to exit from the section you entered.
2	P ₁	Press P ₁ to enable Task Manager.
3	P ₂	Press P ₂ to enable scanner.
4	P ₃	Press P ₃ to enable Battery.
5	P ₄	Press P ₄ to enable Device Setting.
6	Enter	Press the Enter button to access the menu options and confirm your selection.
7	Navigation key	Use the up, down, left, and right arrow keys to navigate through the menu options.
8	OK	Press the OK button to access the menu options and confirm your selection.