

CUSTOM

 **Bluetooth**

IRDA/RS232



www.sixload.com

Print from
PalmOS and
PocketPC

Light Weight

Long Lasting

Thermal Portable Printers

s'print

s'print

s'print portable thermal printers offer an innovative alternative to impact-based systems.

Very light weight and compact size. Easy paper automatic loading through the "sixload" patented system. End of paper and black mark sensors. Updating customer logo and most common barcodes printing: EAN 13, EAN 8, CODE 39, ITF, CODABAR.

s'print-s is powered using an external power supply, with RS232 serial interface.

The printer is suitable for applications such as instruments, receipts and coupon printing, bank transactions confirming reports.

s'print-b is powered using batteries with RS232 serial interface + Bidirectional infrared.

s'print-i is powered using batteries with RS232 serial interface+IrDA (IrDA protocol supported: IrLPT/IrCOMM 3 wire raw).

s'print-BT is able to print wireless at high speed without any alignment thanks to *Bluetooth*® wireless specification.

It is powered by batteries with RS232 serial interface + *Bluetooth*® technology.

The supported profiles are SPP (Serial Port Profile) that provides RS232 serial cable emulation, and OPP (Object Push Profile) enabling the print-out of vCard format objects (business cards).

s'print-b, s'print-i and s'print-BT are suitable for "wireless" applications, combined with PDAs, laptop computers and mobile phones.

s'print-LP1 printer for labels, width 58mm and height 1" inch minimum. s'print-LP1 finds ideal application in automatic identification and safety markets, in automotive and combined with portable terminals without printers. It is equipped with EasyLabel software to create/manage labels (Windows 98/2k/XP).

Print from PDAs

With s'print is possible to print text and graphic from all Palm Powered products thanks to PalmOSprint free application.

It's also available on request a libraries set to allow printing application development.

PalmOS and Microsoft PocketPC2002/2003 are the supported platforms.

Batteries

Battery charger: 12-36 VDC/0.6A.
Batteries: 5 AA penlight (NI-MH/NI-CD/ALKALINE).
Battery Life: 140 mt. of paper (STANDARD CUSTOM receipt and 1850 mAh battery).
Autonomy (hours): 2 h 20 min (STANDARD CUSTOM receipt and 1850 mAh battery).

Accessories


s'print is equipped with:

- handy belt fixing hook
- smart and tough shock resistant holder



s'print
Your Smaller
Portable Printer

Handy and smart pocket pouch

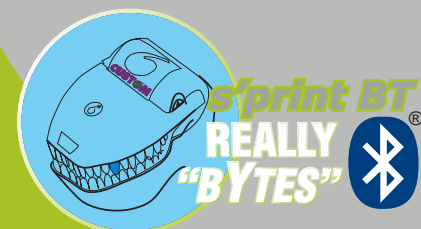



s'print - s

s'print - b

s'print - i / LP1

s'print - BT / LP1

Printing Method Thermal line printing

Resolution 203 dpi

Printing Speed > 50 mm/sec (It depends by the battery status, the printing typology and the environment temperature.)

Columns 24 (40/42 version is available)

Character Set ASCII standard, International

Type Styles Normal, double height/width, negative, underlines, expanded

Printing Direction Straight, reverse

Paper Width 58 mm

Roll Dimension 57.5 mm ± 1mm

Emulation Custom

Interface RS232

RS232 + Bidirectional infrared

RS232 + Bluetooth® technology (power class: 3, max distance: 10 m.)

IRDA protocol

IrLPT, IRCOMM 3 wire RAW

Supported Bluetooth® profiles

SPP (Serial Port Profile) & OPP (Object Push Profile)

Baud Rate 600 to 38.400 bps

Data Buffer 128 byte

Flash Memory 32K

Graphic Memory 1 logo of 384 x 85 dot

Drivers Windows™ 95 / 98 / me / NT4 / 2K / XP

Windows™ NT4 / 2K / XP

Software Tools LogoEditor, FontEditor, Easy Label, 40/42 columns font available

Power 9 - 48 VDC / 11VA

12-36 Vdc / 0.6A (battery charger)

Power Consumption 1200 - 230 mA

925 mA

Reliability MTBF 50 Km

Safety EN60950+A1+A2+A3+A4

Dimension 146 x 88 x 65 mm

Weight 370 gr (without paper roll)



Automotive Applications Approval



CUSTOM[®]


CUSTOM ENGINEERING SPA

Via Berettine, 2 - 43010 Fontevivo, Parma ITALY
Tel. +39 0521 680111 - Fax +39 0521 610701
info@custom.biz - www.custom.biz



M. U. R. S. T.
Ministry University
Research Scientific
Technology
Authorized laboratory
n o . 5 0 8 4 6 Z Y Z

POS Solutions

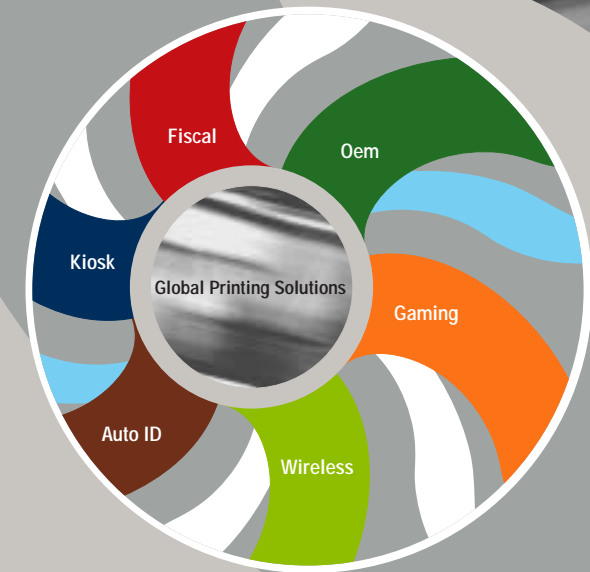

CUSTOM ENGINEERING MILAN
Via Pavia, 10 - 20053 Muggiò, Milano ITALY
Tel. +39 039 2144280 - Fax +39 039 2144249
custom.milano@custom.it

CUSTOM ENGINEERING MODENA
V.le Virgilio, 56D - 41010 Modena ITALY
Tel. +39 059 8869511 - Fax +39 059 8869512
custom.modena@custom.it

CUSTOM ENGINEERING UK LTD
31 Scott Road, Sundon Park
Luton LU3 3BF UK
Tel +44 (0) 1582 582258 - Fax +44 (0) 1582 564888
uk.sales@custom.it

CUSTOM ENGINEERING IBERIAN
Calle Azagador de Alboraya, 14 P.ta 16
46020 Valencia SPAIN
Tel. +34 96 3627315 - Fax +34 96 3627315
es.ventas@custom.it

CUSTOM ENGINEERING USA
3104 N. Arlington Heights Rd.
Arlington Heights, IL 60004
Tel. +1 (847) 818-1260 - Fax +1 (847) 818-1287
us.sales@custom.it